

RECESSED LIGHTING

Introducing the **ALURA**



The **ALURA** is a decorative, stylish recessed LED luminaire with clean lines and opal diffuser. Ideal for offices, conference facilities, schools and shopping malls. The **ALURA** has an acceptable efficacy to provide a low-cost solution.



Consult SA (PTY) LTD



SABS
ISO 9001



Product Benefits



- Attractive and efficient
- Modern sleek design
- Low maintenance
- Integral LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark



Product Features

- Highly efficient diffuser with semi-recessed panels
- Variable light output possible by adjusting LED drive current
- Available with plain or perforated in-fill panels
- Options include DALI dimming, Bluetooth mesh control, tuneable white, emergency and HF sensor.
- Long life
- Available in a 2 or 3 cell version - 600x600 or 1200x600 ceiling format
- LED life L_{80B10} - 50 000 hours
- Driver life F_{10} - 50 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

 **119 lm/W**

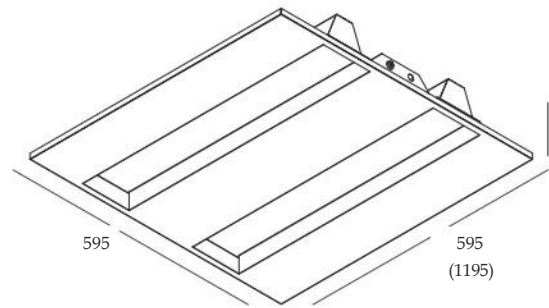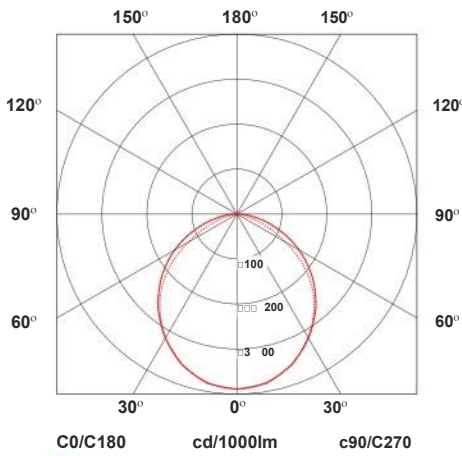

Efficacy Rating

-  **PREMIUM RANGE** >140 lm/W
-  **MID RANGE** 120 - 140 lm/W
-  **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600x600 2-cell					
30W	3 460	4000K	115	>80	LLC-ALU-30W-2C6
40W	4 400	4000K	110	>80	LLC-ALU-40W-2C6
1200x600 2-cell					
47W	5 580	4000K	119	>80	LLC-ALU-47W-2C12
63W	7 200	4000K	114	>80	LLC-ALU-63W-2C12
600x600 3-cell					
39W	4 620	4000K	118	>80	LLC-ALU-39W-3C6
52W	5 800	4000K	112	>80	LLC-ALU-52W-3C6
1200x600 3-cell					
71W	8 370	4000K	119	>80	LLC-ALU-71W-3C12
95W	10 800	4000K	114	>80	LLC-ALU-95W-3C12

