

RECESSED LIGHTING

Introducing the ATLANA



The **ATLANA** is an efficient circular diffuser back lit LED panel for recessed, surface mount and suspended applications for offices, schools, shopping centres and reception areas.



Consult SA (PTY) LTD



SABS
ISO 9001



Product Benefits


- Attractive and efficient
- Built In LED driver
- Easy installation
- Low maintenance
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark

Product Features

- Efficient back-lit opal diffuser
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, Bluetooth mesh control, tuneable white, emergency backup and HF sensors.
- Long life
- Available in 600x600 or 1200x300 or 1200x600 ceiling format
- LED life L70B50 - 50 000 hours
- Driver life F10 - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee



110 lm/W

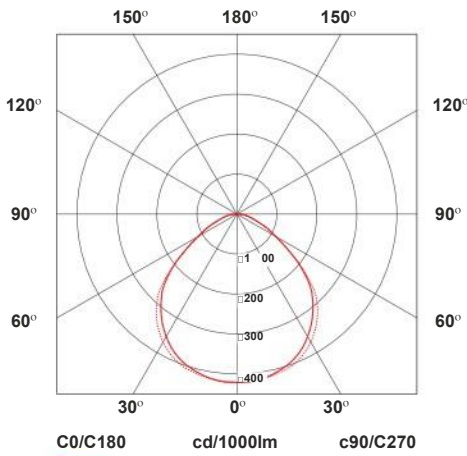

Efficacy Rating

- PREMIUM RANGE** >140 lm/W
- MID RANGE** 120 - 140 lm/W
- ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600x600					
19W-50W	1 725-4 023	4000K	91	>80	LLC-ATA-32W-50W-6-4K
1200x600					
38W-100W	3 458-9 100	4000K	110	>80	LLC-ATA-38W-100W12-4K

