

LINEAR LIGHTING

Introducing the  
**BATMAN 75**



The **BATMAN 75** is a decorative linear surface or suspended luminaire with an opal polycarbonate diffuser. Ideal for the illumination of walkways, reception areas and meeting rooms.



Consult SA (PTY) LTD



**SABS**  
ISO 9001

# BATMAN 75





## Product Benefits

- Attractive and efficient
- Low energy consumption
- Modern sleek design
- Low maintenance
- Built-in LED driver
- Easy installation
- SABS approved control gear
- SANS-IEC 60598 safety compliance and mark
- Magnetic end-caps

## Product Features

- Black or white powder coating - special colours on request
- Extruded Aluminium 6063
- Options include DALI dimming, emergency and Li-Connect Bluetooth mesh control
- Long life
- LED life  $L_{80B50}$  - 50 000 hours
- Driver life  $F_{10}$  - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Ripple current (flicker) < 5%
- 5 year guarantee

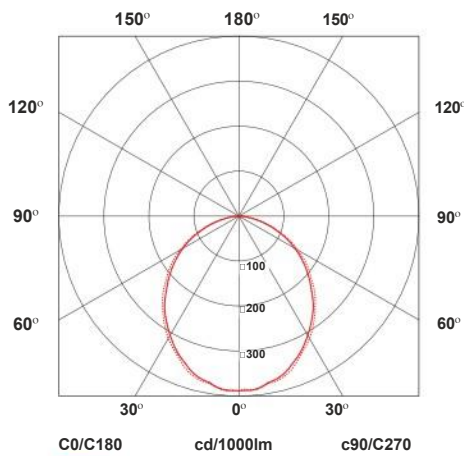

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
8 W/m	910	4000K	95	>80	LLC-BAT-75-HE (125mA)
16.4 W/m	1230	4000K	90	>80	LLC-BAT-75-HE2 (250mA)
23.1 W/m	1890	4000K	85	>80	LLC-BAT-75-HO (350mA)
33.8 W/m	2510	4000K	80	>80	LLC-BAT-75-SO (500mA)
37.3 W/m	3090	4000K	78	>80	LLC-BAT-75-SO2 (550mA)

Length determined by minimum LED board length of 140mm so available in 570mm, 710mm, 850mm, 990mm, 1270mm, 1410mm, 1550mm, 1690mm, 1830mm, 1970mm, 2110mm and maximum 2250mm



Consult SA (PTY) LTD



SABS  
ISO 9001