

LINEAR LIGHTING

# Introducing the BATMAN 70

The **BATMAN 70** is a decorative recessed linear luminaire with an opal polycarbonate diffuser. Suitable for walkways, reception areas, shopping malls and similar flush-plasterboard ceiling applications.



Consult SA (PTY) LTD



**SABS**  
ISO 9001

# BATMAN 70





## Product Benefits

- Attractive and efficient
- Low energy consumption
- Modern sleek design
- Low maintenance
- Built-in LED driver
- Easy installation
- SABS approved control gear
- SANS-IEC 60598 safety compliance and mark
- Magnetic end-caps



## Product Features

- Variable output possible by setting different drive currents
- Available in DALI, EMG, additional surge protection
- Options include DALI dimming, emergency and Li-Connect Bluetooth mesh control
- Long life
- Stainless steel mounting clips allow simple installation
- LED life  $L_{70B50}$  - 50 000 hours
- Driver life  $F_{10}$  - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Ripple current (flicker) < 5%
- 5 year guarantee

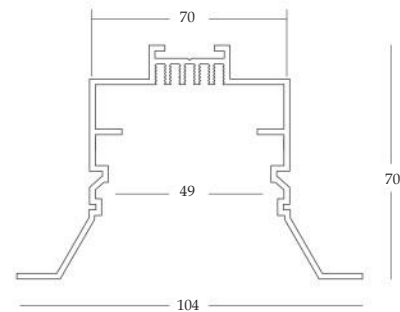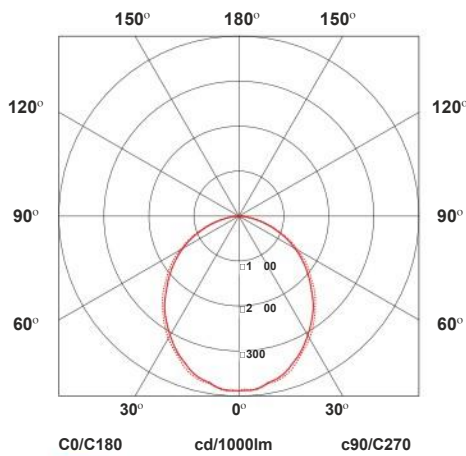

Luminaire Wattage per metre	Luminaire Output (Lumens) per metre	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
8 W/m	910 lm/m	4000K	95	>85	LLC-BAT-70R-HE 125mA
16.4 W/m	1230 lm/m	4000K	90	>85	LLC-BAT-70R-HE2 250mA
23.1 W/m	1890 lm/m	4000K	85	>85	LLC-BAT-70R-HO 350mA
33.8 W/m	2510 lm/m	4000K	80	>85	LLC-BAT-70R-SO 500mA
37.3 W/m	3090 lm/m	4000K	78	>85	LLC-BAT-70R-SO2 550mA

Length determined by minimum LED board length of 140mm so available in 570mm, 710mm, 850mm, 990mm, 1270mm, 1410mm, 1550mm, 1690mm, 1830mm, 1970mm, 2110mm and maximum 2250mm



Consult SA (PTY) LTD

