

WALL LIGHTING

Introducing the BIZARRO-R



The **BIZARRO-R** is a decorative, stylish bulkhead with modern features and an opal polycarbonate diffuser, ideal for any outdoor project.



Consult SA (PTY) LTD





SABS
ISO 9001

BIZARRO-R



Product Features

- High efficient opal diffuser
- For emergency battery back up add "E" to end of the catalogue reference
- IP65 Round die-cast aluminum bulkhead complete with stainless steel screws, helicoils and UV stabilised opal diffuser
- Temperature range = -25 deg. C to +45 deg. C for performance operation (Tc on board < 65 deg. C
- Long life
- LED life L80B10 - 50 000 hours
- Driver life F10 - 50 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Ripple current (flicker) < 30%
- 5 year guarantee

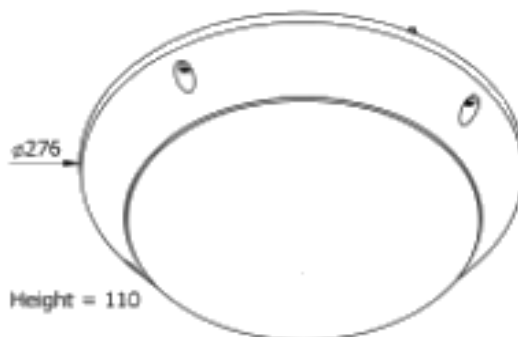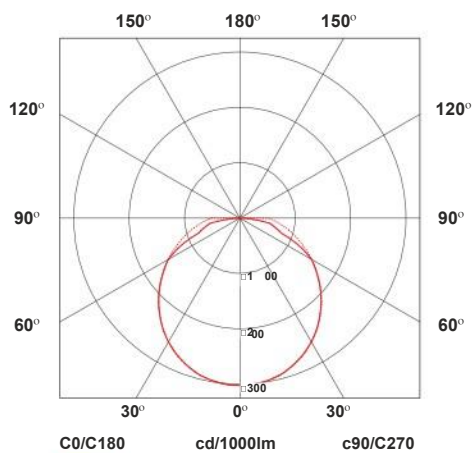

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
11W	1 701	4000K	159	>80	LLC-BIZ-R-11W-4K
16W	2 321	4000K	147	>80	LLC-BIZ-R-16W-4K



Consult SA (PTY) LTD

