

RECESSED LIGHTING



Introducing the **CLIO**



The **CLIO** is a decorative, stylish recessed LED luminaire with clean lines and low glare aluminium louvre. Ideal for offices, conference facilities, schools and shopping malls.



Consult SA (PTY) LTD



SABS
ISO 9001



Product Benefits



- Attractive and efficient
- Modern sleek design
- Very good glare control - UGR < 18
- Low maintenance
- Integral LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark



Product Features

- Highly efficient super-purity matt aluminium louvres with diffusing film
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, Bluetooth mesh control, tuneable white, emergency backup and HF sensors.
- Long life
- Available in 2 or 3 cell louvres and 600x600 or 1200x600 ceiling format
- LED life L₈₀B₁₀ - 50 000 hours
- Driver life F₁₀ - 50 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

 **137 lm/W**

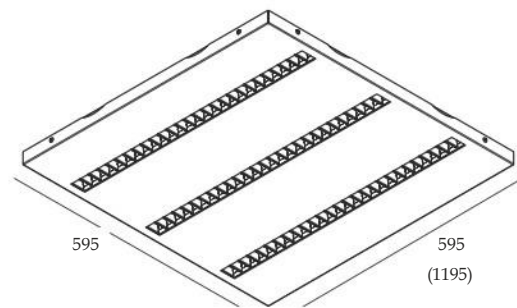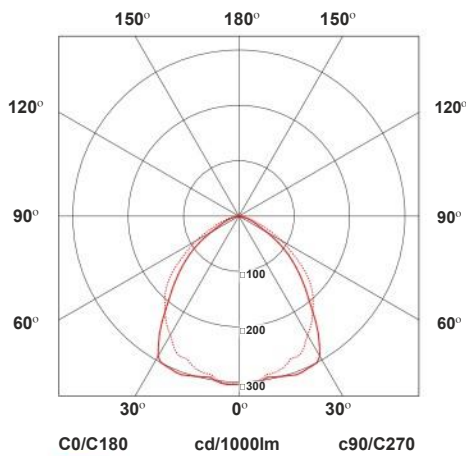

Efficacy Rating

-  **PREMIUM RANGE** >140 lm/W
-  **MID RANGE** 120 - 140 lm/W
-  **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600 x 600 2-Cell					
25W	3 370	4000K	130	>80	LLC-CLO-25W-2C6
35W	4 490	4000K	128	>80	LLC-CLO-35W-2C6
1200 x 600 2-Cell					
43W	5 800	4000K	135	>80	LLC-CLO43W-2C12
60W	7 640	4000K	127	>80	LLC-CLO-60W-2C12
600 x 600 3-Cell					
32W	4 380	4000K	137	>80	LLC-CLO-32W-3C6
50W	6 580	4000K	132	>80	LLC-CLO-50W-3C6
1200 x 600 3-Cell					
65W	8 700	4000K	135	>80	LLC-CLO-65W-3C12
90W	11 460	4000K	127	>80	LLC-CLO-90W-3C12

