

RECESSED LIGHTING



Introducing the DOYLE



The **DOYLE** is an decorative efficient back-lit LED panel for recessed, surface mount and suspended applications for offices, schools, shopping centres and reception areas.



Consult SA (PTY) LTD




SABS
ISO 9001



Product Benefits



- Attractive and efficient
- Built in LED driver
- Easy installation
- Low maintenance
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark

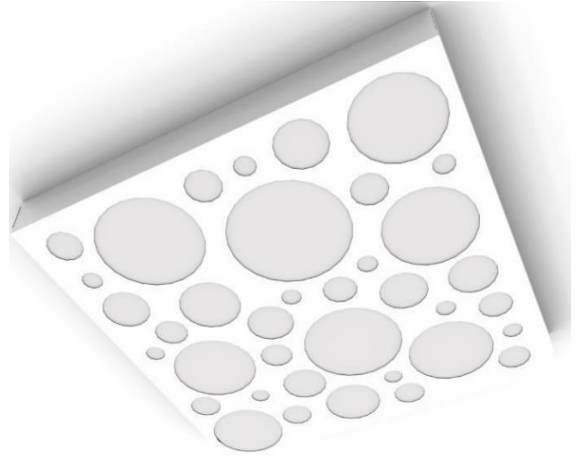

Product Features

- Efficient back-lit opal diffuser
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, Bluetooth mesh control, tuneable white, emergency backup and HF sensor.
- Long life
- Available in 600x600 or 1200x300 or 1200x600 ceiling format
- LED life L70B50 - 50 000 hours
- Driver life F10 - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

91 lm/W

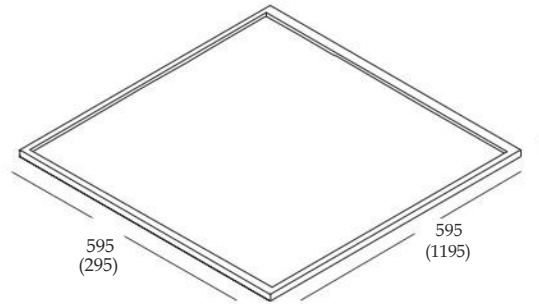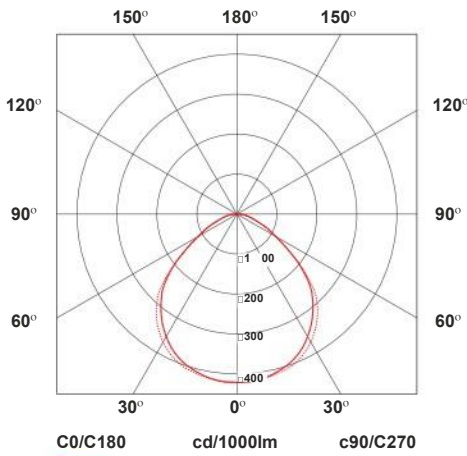

Efficacy Rating

- PREMIUM RANGE** >140 lm/W
- MID RANGE** 120 - 140 lm/W
- ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600x600					
19W-50W	1 725-4 023	4000K	91	>80	LLC-DYE-19W50W-6-4K
1200x600					
38W-100W	3 503-7 774	4000K	91	>80	LLC-DYE-38W-100W-12-4K

