



Introducing the **GERAS**



The **GERAS** is an elegant solution for surface mount applications such as retail stores, walkways, parking garages, schools, circulation areas, back of house etc.



Consult SA (PTY) LTD



SABS
ISO 9001

GERAS



Product Benefits


- Low, polycarbonate housing extruded to 1mm (no glass)
- Attractive and efficient
- Low energy consumption
- Modern sleek design
- Low maintenance
- Direct Drive Technology Onboard
- Long life
- Easy installation
- SABS approved control gear
- SANS-IEC 60598 safety compliance and mark

Product Features

- Attractive wide angle diffuser
- Options include DALI dimming, LI-Connect Bluetooth mesh control, tuneable white, emergency and sensor including Organic Response sensor.
- LED life L70B10 - 60 000 hours
- Direct Drive Technology Onboard
- Supply = 220-240V 50-60Hz PF>0.95
- Surge current (flicker) < 5%
- Surge Protection 1,5kV
- 6 year Guarantee



133 lm/W

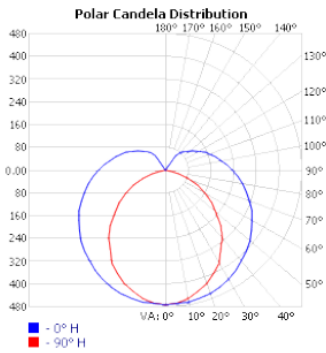

Dimensions



Efficacy Rating

- PREMIUM RANGE** >140 lm/W
- MID RANGE** 120 - 140 lm/W
- ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
1200mm module					
32W	4 256	5000K	133	>85	LLC-GRS-32W-1R12



Consult SA (PTY) LTD

