

# RECESSED LIGHTING



## Introducing the **HARPY**



The **HARPY** is a decorative, stylish recessed LED luminaire with clean lines and low glare specular aluminium louvre. Ideal for offices, conference facilities, schools and shopping malls.



Consult SA (PTY) LTD



**SABS**  
ISO 9001

# HARPY




## Product Benefits



- Attractive and efficient
- Modern sleek design
- Good glare control - UGR < 19
- Low maintenance
- Built In LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark

## Product Features

- Highly efficient super-purity matt aluminium louvres with LED hiding diffuser
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, Bluetooth mesh control, emergency backup and HF sensors.
- Long life
- Available in 2 or 3 cell louvres and 600x600 or 1200x600 ceiling format
- LED life  $L_{80B10}$  - 50 000 hours
- Driver life  $F_{10}$  - 50 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

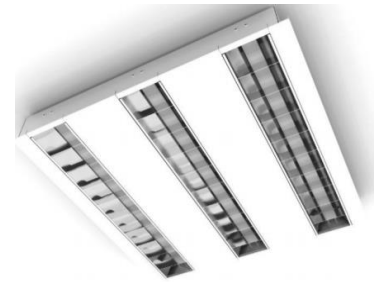

 **118 lm/W**

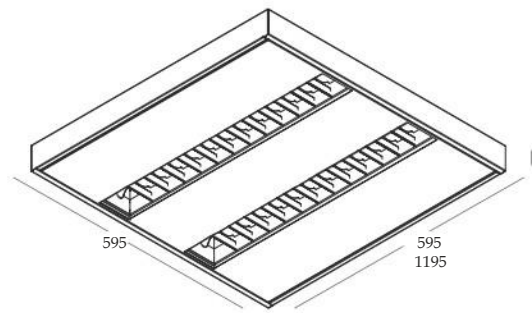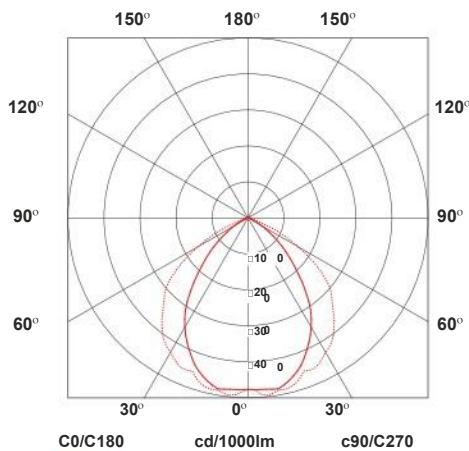

## Efficacy Rating

-  **PREMIUM RANGE** >140 lm/W
-  **MID RANGE** 120 - 140 lm/W
-  **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
<b>600 x 600 2-Cell</b>					
32W	3 660	4000K	114	>80	LLC-HRP-32W-2C6
39W	4 350	4000K	113	>80	LLC-HRP-39W-2C6
<b>1200 x 600 2-Cell</b>					
50W	5 880	4000K	118	>80	LLC-HRP-50W-2C12
61W	7 060	4000K	116	>80	LLC-HRP-61W-2C12
<b>600 x 600 3-Cell</b>					
38W	4 410	4000K	118	>80	LLC-HRP-38W-3C6
48W	5 500	4000K	115	>80	LLC-HRP-48W-3C6
<b>1200 x 600 3-Cell</b>					
75W	8 820	4000K	118	>80	LLC-HRP-75W-3C12
92W	10 590	4000K	116	>80	LLC-HRP-92W-3C12

