

HIGHBAY LIGHTING



Introducing the HERA



The **HERA** is a decorative, stylish, LINEAR surface or suspended LED luminaire with a wide range of light distribution and output options for retail, storage and industrial applications.



Consult SA (PTY) LTD



SABS
ISO 9001

HERA



Product Benefits



- Attractive and efficient
- Low maintenance
- Built-in LED driver
- Easy installation
- SABS approved control gear
- SANS-IEC 60598 safety compliance and mark

Product Features

- Highly efficient modular optics
- Low glare
- Variable output possible by setting different drive currents
- Options include emergency, DALI dimmable, LI-Connect Bluetooth mesh control and additional surge protection
- Long life
- Stainless steel mounting clips allow simple installation
- LED life L_{80B10} - 50 000 hours
- Driver life F_{10} - 100 000 hours
- Supply = 220-240V 50-60Hz PF>0.95
- Surge current (flicker) < 5%
- 5 year guarantee



145 lm/W

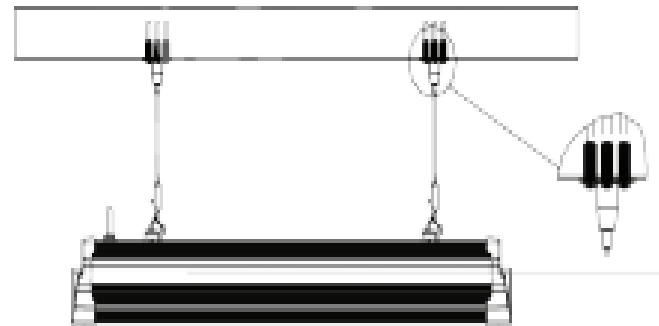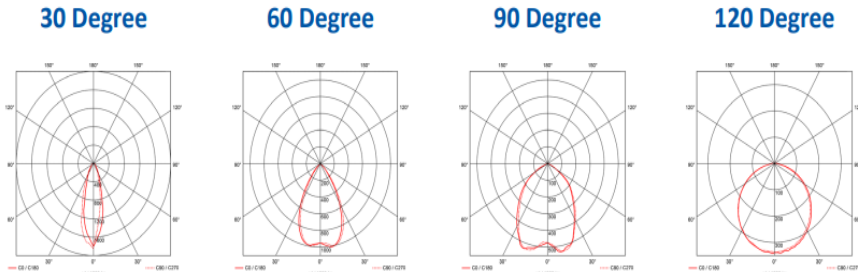

A wide range of light distributions are available, including Diffuse, Standard, Retail Symmetric, Retail Asymmetric, Narrow 30 deg., Wide 60 deg., Extra Wide 90 deg. and High Rack (Oval).

Efficacy Rating

- PREMIUM RANGE** >140 lm/W
- MID RANGE** 120 - 140 lm/W
- ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
50W	7 250	4000K	145	>80	LLC-HRA-50W-4K
100W	14 500	4000K	145	>80	LLC-HRA-100W-4K
150W	21 750	4000K	145	>80	LLC-HRA-150W-4K
200W	29 000	4000K	145	>80	LLC-HRA-200W-4K
300W	42 000	4000K	140	>80	LLC-HRA-300W-4K
400W	56 000	4000K	140	>80	LLC-HRA-400W-4K
500W	70 000	4000K	140	>80	LLC-HRA-500W-4K



Consult SA (PTY) LTD

