



Introducing the **KAMANDI**



The **KAMANDI** is a decorative, stylish surface LED luminaire with clean lines and a Rolled Opal Diffuser. Ideal for offices, conference facilities, schools and shopping malls.

The **KAMANDI** takes advantage of the latest LED technology and light control film to provide a high efficacy product with very good glare control.



Consult SA (PTY) LTD



SABS
ISO 9001

KAMANDI



Product Benefits


- Attractive and efficient
- Leading edge efficacy LED'S enable very low energy consumption
- Low glare - UGR < 19
- Modern sleek design
- Low maintenance
- Built In LED driver
- Easy installation
- SABS approved driver
- SANS-IEC 60598 safety compliance and mark

Product Features

- Rolled Opal Diffuser
- Variable light output possible by adjusting LED drive current
- Options include DALI dimming, LI-Connect Bluetooth mesh control, tuneable white, emergency and sensor including Organic Response sensor
- Long life
- LED life L80B10 - 50 000 hours
- Driver life F10 - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee



 **147 lm/W**

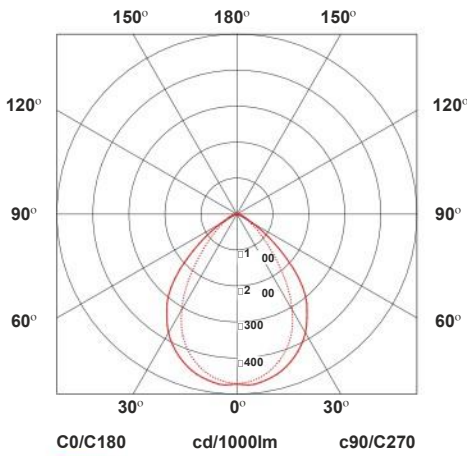

Efficacy Rating

-  **PREMIUM RANGE** >140 lm/W
-  **MID RANGE** 120 - 140 lm/W
-  **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
600mm Module					
13W-60W	1 135-4 428	4000K	147	>85	LLC-KAM-13-60-2C6
1200mm Module					
25W-120W	2 432-9 585	4000K	147	>85	LLC-KAM-25-120-3C12



Consult SA (PTY) LTD

