

ARCHITECTURAL LIGHTING

Introducing the **KITANA-S**



The **KITANA-S** is an efficient decorative recessed LED downlight luminaire suitable for accent and area lighting in offices, schools and public areas - small size best suited for rest room and accent lighting.



Consult SA (PTY) LTD



SABS
ISO 9001

KITANA-S




Product Features

- Housing in die-cast aluminium - powder coated with structured finish
- Super-purity aluminium reflector with two beam angle options
- Good heat dissipation due to cast aluminium heat sink
- Remote LED driver
- Available in CCT 3000K and 4000K - additional specialised colours available on request
- Available in CRI Ra > 80 and Ra > 90
- Options include DALI dimming, emergency backup and Bluetooth mesh control
- LED life L₈₀B₁₀ - 50 000 hours
- Driver life F₁₀ - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee



 118 lm/W

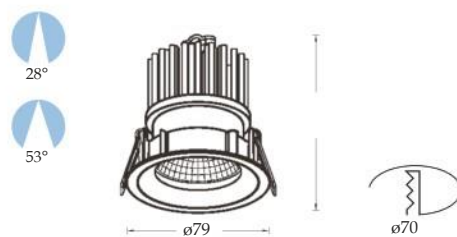

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
10W (250mA)	820	3000K	82	>80	LLC-KIT-S-10W-3K
10W (250mA)	880	4000K	88	>80	LLC-KIT-S-10W-4K
14W (350mA)	1 160	3000K	83	>80	LLC-KIT-S-14W-3K
14W (350mA)	1 240	4000K	89	>80	LLC-KIT-S-14W-4K



Consult SA (PTY) LTD



SABS
ISO 9001