

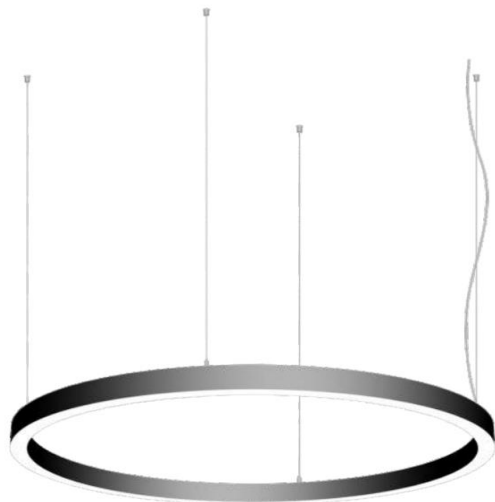


LEANDER



Installations

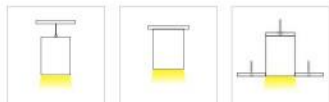

Luminaire Parameters




Lighting Source:	SMD2835 SANAN/SAMSUNG/OSRAM
Life Span:	L80 B20 @ 50,000hrs.
CRI:	>80 (Optional >90/>95)
Color Temperature:	Warm white (2700/3000K) /Nature white (4000K)/Cold white(6000K)
Tunable White:	2700-6500K
Gear Control Mode:	No DIM/1-10V/Triack/Push/DALI DIM/DALI DT8
Input Voltage:	220-240VAC/110-277VAC
Material:	Aluminum 6063-T5
Lampshade:	Polycarbonate Diffuser
Body Color:	Black/White/Silver/Gold
IP Rating:	IP20
Glow Wire Test :	850°
Luminaire Installation :	Pendant/Surface/Wall/Recessed
Warranty :	5Years

Standard Models


Model Number	Dimension	Power	Luminous Flux
LLC4060-450	φ450*W40*H60mm	10W	900lm
LLC4060-600	φ600*W40*H60mm	15W	1350lm
LLC4060-740	φ740*W40*H60mm	20W	1800lm
LLC4060-900	φ900*W40*H60mm	25W	2250lm
LLC4060-1000	φ1000*W40*H60mm	30W	2700lm
LLC4060-1200	φ1200*W40*H60mm	35W	3150lm
LLC4060-1540	φ1540*W40*H60mm	40W	3600lm
LLC4060-1840	φ1840*W40*H60mm	50W	4500lm
LLC4060-2040	φ2040*W40*H60mm	60W	5400lm
LLC4060-2440	φ2440*W40*H60mm	75W	6750lm
LLC4060-3040	φ3040*W40*H60mm	90W	8100lm
LLC4060-4040	φ4040*W40*H60mm	120W	18000lm
LLC4060-5040	φ5040*W40*H60mm	150W	13500lm



LEANDER

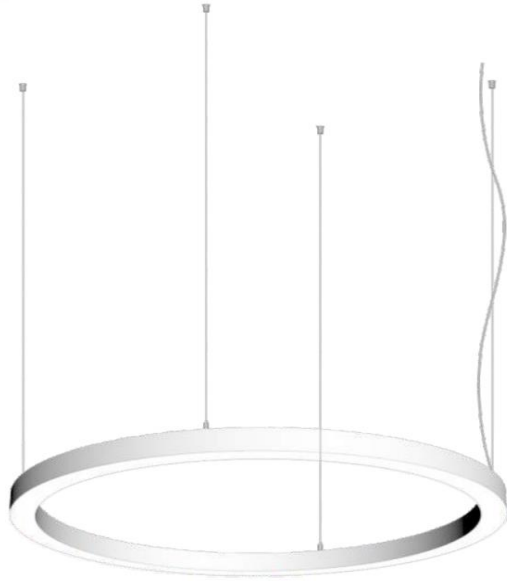

Installations



Luminaire Parameters




Lighting Source:	SMD2835 SANAN/SAMSUNG/OSRAM
Life Span:	L80 B20 @ 50,000hrs.
CRI:	>80 (Optional >90/>95)
Color Temperature:	Warm white (2700/3000K) /Nature white (4000K)/Cold white(6000K)
Tunable White:	2700-6500K
Gear Control Mode:	No DIM/1-10V/Triack/Push/DALI DIM/DALI DT8
Input Voltage:	220-240VAC/110-277VAC
Material:	Aluminum 6063-T5
Lampshade:	Polycarbonate Diffuser
Body Color:	Black/White/Silver/Gold
IP Rating:	IP20
Glow Wire Test :	850°
Luminaire Installation :	Pendant/Surface/Wall/Recessed
Warranty :	5Years

Standard Models


Model Number	Dimension	Power	Luminous Flux
LLC6060-450	φ450*W60*H60mm	20W	2000lm
LLC6060-600	φ600*W60*H60mm	30W	3000lm
LLC6060-900	φ900*W60*H60mm	40W	4000lm
LLC6060-1000	φ1000*W60*H60mm	50W	5000lm
LLC6060-1200	φ1200*W60*H60mm	60W	6000lm
LLC6060-1560	φ1560*W60*H60mm	80W	8000lm
LLC6060-1860	φ1860*W60*H60mm	110W	11000lm
LLC6060-2060	φ2060*W60*H60mm	120W	12000lm
LLC6060-2460	φ2460*W60*H60mm	150W	15000lm
LLC6060-3060	φ3060*W60*H60mm	180W	18000lm
LLC6060-4060	φ4060*W60*H60mm	240W	24000lm
LLC6060-5060	φ5060*W60*H60mm	320W	32000lm



LEANDER

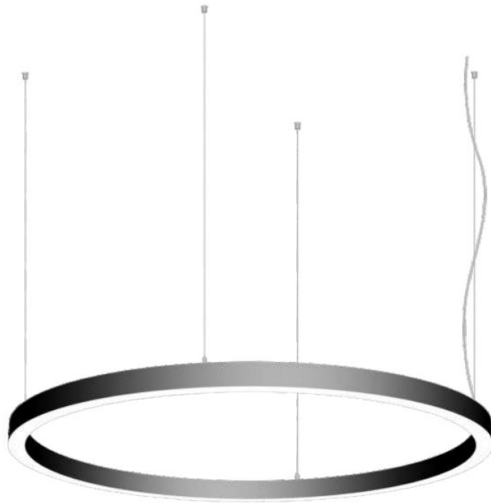

Installations



Luminaire Parameters




Lighting Source:	SMD2835 SANAN/SAMSUNG/OSRAM
Life Span:	L80 B20 @ 50,000hrs.
CRI:	>80 (Optional >90/>95)
Color Temperature:	Warm white (2700/3000K) /Nature white (4000K)/Cold white(6000K)
Tunable White:	2700-6500K
Gear Control Mode:	No DIM/1-10V/Triack/Push/DALI DIM/DALI DT8
Input Voltage:	220-240VAC/110-277VAC
Material:	Aluminum 6063-T5
Lampshade:	Polycarbonate Diffuser
Body Color:	Black/White/Silver/Gold
IP Rating:	IP20
Glow Wire Test :	850°
Luminaire Installation :	Pendant/Surface/Wall/Recessed
Warranty :	5Years

Standard Models



Model Number	Dimension	Power	Luminous Flux
LLC4080-450	φ450*W40*H80mm	10W	900lm
LLC4080-600	φ600*W40*H80mm	15W	1350lm
LLC4080-740	φ740*W40*H80mm	20W	1800lm
LLC4080-900	φ900*W40*H80mm	25W	2250lm
LLC4080-1000	φ1000*W40*H80mm	30W	2700lm
LLC4080-1200	φ1200*W40*H80mm	35W	3150lm
LLC4080-1540	φ1540*W40*H80mm	40W	3600lm
LLC4080-1840	φ1840*W40*H80mm	50W	4500lm
LLC4080-2040	φ2040*W40*H80mm	60W	5400lm
LLC4080-2440	φ2440*W40*H80mm	75W	6750lm
LLC4080-3040	φ3040*W40*H80mm	90W	8100lm
LLC4080-4040	φ4040*W40*H80mm	120W	18000lm
LLC4080-5040	φ5040*W40*H80mm	150W	13500lm



LEANDER

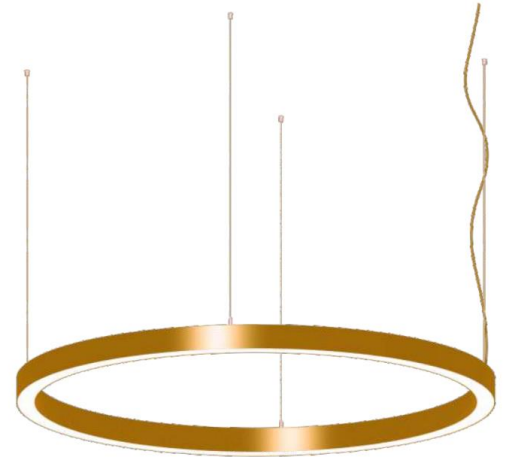

Installations

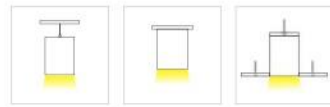

Luminaire Parameters



Lighting Source:	SMD2835 SANAN/SAMSUNG/OSRAM
Life Span:	L80 B20 @ 50,000hrs.
CRI:	> 80 (Optional >90/>95)
Color Temperature:	Warm white (2700/3000K) /Nature white (4000K)/Cold white(6000K)
Tunable White:	2700-6500K
Gear Control Mode:	No DIM/1-10V/Triack/Push/DALI DIM/DALI DT8
Input Voltage:	220-240VAC/110-277VAC
Material:	Aluminum 6063-T5
Lampshade:	Polycarbonate Diffuser
Body Color:	Black/White/Silver/Gold
IP Rating:	IP20
Glow Wire Test :	850°
Luminaire Installation :	Pendant/Surface/Wall/Recessed
Warranty :	5Years

Standard Models

Model Number	Dimension	Power	Luminous Flux
LLC6080-450	φ450*W60*H80mm	20W	2000lm
LLC6080-600	φ600*W60*H80mm	30W	3000lm
LLC6080-900	φ900*W60*H80mm	40W	4000lm
LLC6080-1000	φ1000*W60*H80mm	50W	5000lm
LLC6080-1200	φ1200*W60*H80mm	60W	6000lm
LLC6080-1560	φ1560*W60*H80mm	80W	8000lm
LLC6080-1860	φ1860*W60*H80mm	110W	11000lm
LLC6080-2060	φ2060*W60*H80mm	120W	12000lm
LLC6080-2460	φ2460*W60*H80mm	150W	15000lm
LLC6080-3060	φ3060*W60*H80mm	180W	18000lm
LLC6080-4060	φ4060*W60*H80mm	240W	24000lm
LLC6080-5060	φ5060*W60*H80mm	320W	32000lm

