

# ACCENT LIGHTING



Introducing the  
**PANDORA-L**



**PANDORA-L** is a track-mounted flexible spotlight delivering an ideal lighting system for display lighting, commercial shopping malls, restaurants and especially ideal for retail displays.



Consult SA (PTY) LTD



**SABS**  
ISO 9001


# PANDORA-L



## Product Features

- Housing in extruded aluminium, ends of die-cast aluminium - powder coated with structured finish
- Front ring in thermoplastic
- Super-purity Miro reflector with three beam angle options
- Built-In LED driver
- Available in CCT 3000K and 4000K - additional specialised colours available on request
- Available in CRI Ra > 80 and Ra > 90
- Options include DALI dimming, Bluetooth mesh control and emergency battery backup.
- LED life L<sub>80B10</sub> - 50 000 hours
- Driver life F<sub>10</sub> - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee

 114 lm/W

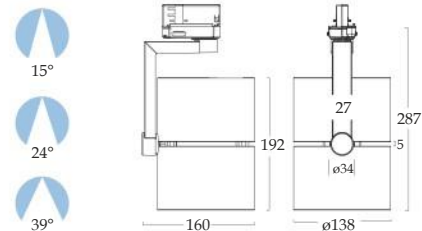

## Efficacy Rating

-  **PREMIUM RANGE** >140 lm/W
-  **MID RANGE** 120 - 140 lm/W
-  **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	RA (CRI)	Reference Code
35W (900mA)	3 700	3000K	105	>80	LLC-PNA-L-35W-WHT-39-3K
35W (900mA)	4 050	4000K	114	>80	LLC-PNA-L-35W-WHT-39-4K
41W (1050mA)	4 190	3000K	103	>80	LLC-PNA-L-41W-WHT-39-3K
41W (1050mA)	4 580	4000K	112	>80	LLC-PNA-L-41W-WHT-39-4K
45W (1150mA)	4 590	3000K	102	>80	LLC-PNA-L-45W-WHT-39-3K
45W (1150mA)	5 000	4000K	112	>80	LLC-PNA-L-45W-WHT-39-4K
51W (1300mA)	5 100	3000K	100	>80	LLC-PNA-L-51W-WHT-39-3K
51W (1300mA)	5 600	4000K	110	>80	LLC-PNA-L-51W-WHT-39-4K



Consult SA (PTY) LTD



**SABS**  
ISO 9001