

Pod-EX

A standout luminaire with IP68 level protection & impressive operating temperature range.



This IP68 fitting is designed for durability in harsh environments and available for Zone 1/2 as well as Zone 21/22.

SPEC SHEET

POD-EX 4

Effective Lumen:	6156 lm	7092 lm
240V:	53W	64W
Power Factor:	0.95	0.95
Effective Efficacy:	117 lm/w	111 lm/w
Max Ta:	40°C	40°C
L&B:	L90 B10 L80 B10	L90 B10 L80 B10
Fitting Size LxW:	2190mm x 50mm	

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 21000 lm.

4 SIZE OPTIONS

- EX Pod 1350
- EX Pod 1630
- EX Pod 1910
- EX Pod 2190



5 year warranty:
Please visit
www.energywise.co.za

CASING

- Impact rating IK08/5J (ZONE 21/22)
- Impact rating IK08/10J (ZONE 1/2)

TEMPERATURE

- Ambient room temperature -25°C to +40°C.



kV Protection:



Colour Temp:
5600K
CR>80 R9>13



**Indoor /
Outdoor**



Front cover:
IK08/J




Modular




Plug & Play

4 Distribution Options

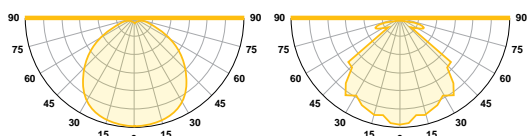

Wide (Frosted)

Wide

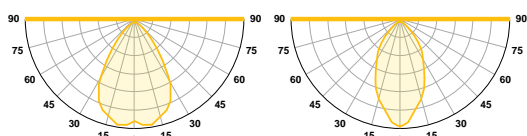

Medium

Narrow



Proudly Distributed By

+2783 555 2654

+2776 087 2363

Consult SA (PTY) LTD www.ledlightconsult.co.za



**Designed and
Manufactured by**

