



Introducing the **POLLUX-LF**



The **POLLUX-LF** commercial downlights deliver up to an impressive 106 LM/W. Supplied with remote driver and fitted with an acrylic diffuser to reduce glare and for even light distribution.



Consult SA (PTY) LTD



SABS
ISO 9001

POLLUX-LF



Product Features



- Low cost energy saving alternative to compact fluorescent fittings
- Life not affected by frequent switching e.g. when used with occupancy controls
- Triac dimmable as standard
- Plug and play remote driver for easy installation
- DALI version available to order
- IP54 rated
- 1.5kV surge protection
- 5 Year Guarantee



106 lm/W

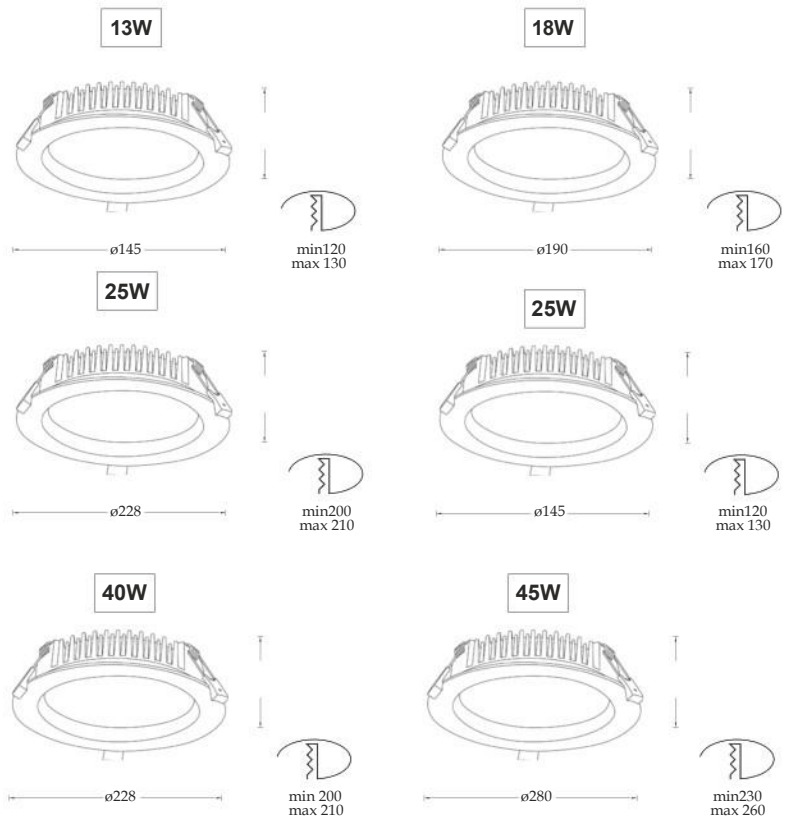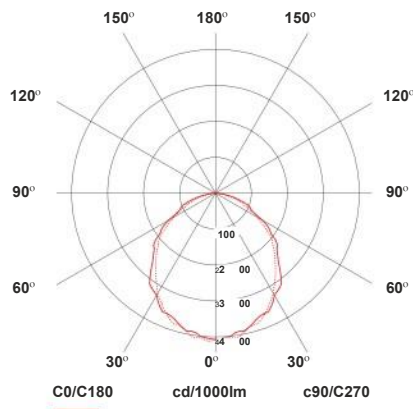

Efficacy Rating

- PREMIUM RANGE** >140 lm/W
- MID RANGE** 120 - 140 lm/W
- ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
13	1 260	4000K	97	>80	LLC-POL-LF-13W-4K
18	1 900	4000K	106	>80	LLC-POL-LF-18W-4K
25	2 600	4000K	104	>80	LLC-POL-LF-25W-4K
40	4 150	4000K	104	>80	LLC-POL-LF-40W-4K
45	4 500	4000K	100	>80	LLC-POL-LF-45W-4K



Consult SA (PTY) LTD



SABS
ISO 9001