

## Introducing the **POLLUX-PS**



The **POLLUX-PS** downlights are engineered to deliver superior light output and uniformity utilising the latest edge-lit LED technology. At only 25mm deep including bracket, they are an ideal solution where ceiling voids are limited but high lumen output is required.



Consult SA (PTY) LTD




**SABS**  
ISO 9001

# POLLUX-PS



## Product Features

- Low cost energy saving alternative to compact fluorescent fittings
- Edge-lit low profile ideal for installations with limited recess space (25mm) and shallow ceiling voids
- Plug and play remote driver for easy installation (40mm space required)
- Separate triac dimmable driver available
- Life not affected by frequent switching e.g. when used with occupancy controls
- IP44 rated
- 1.5kV surge protected
- 5 Year Guarantee

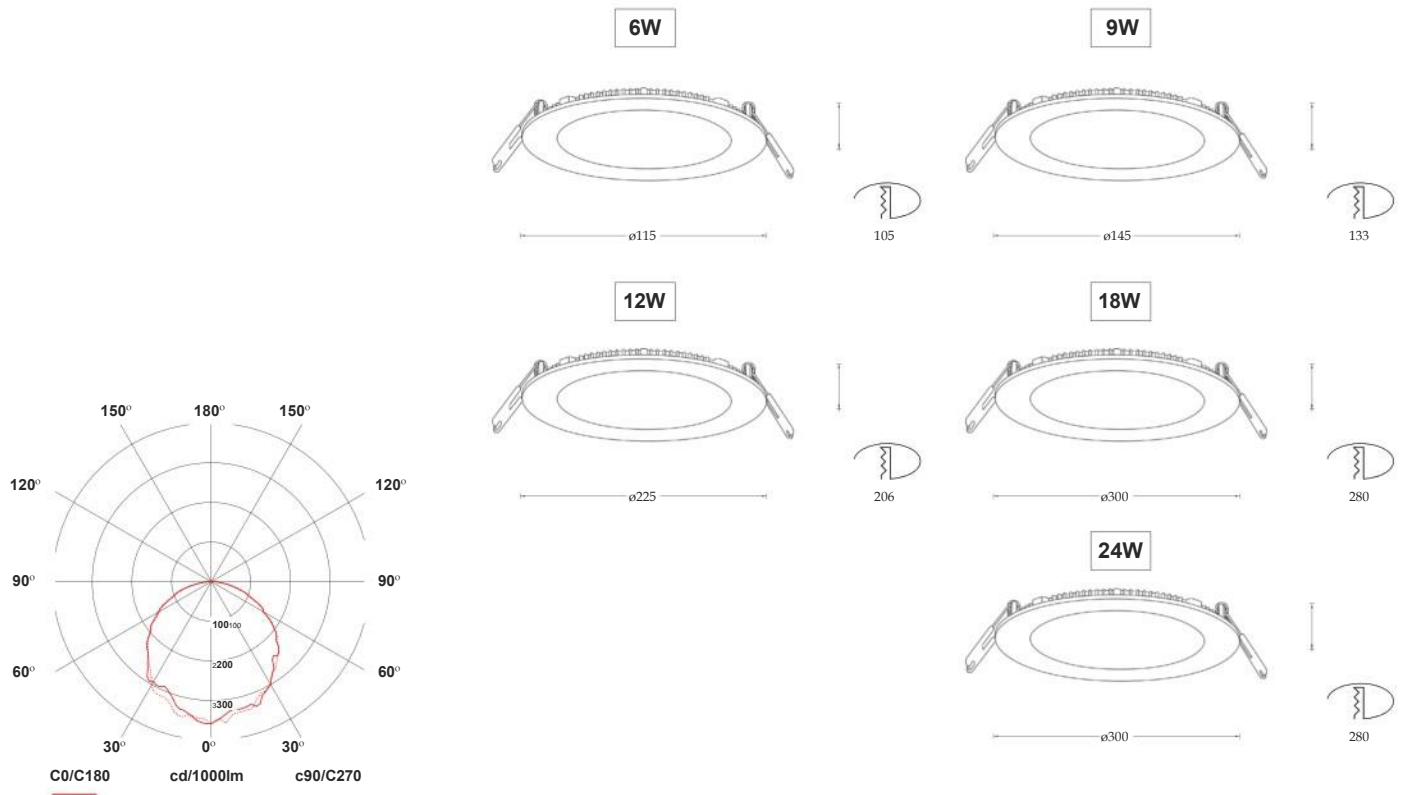

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
6	300	3000K	50	>80	LLC-POL-PS-6W-3K
6	330	4000K	55	>80	LLC-POL-PS-6W-4K
9	450	3000K	50	>80	LLC-POL-PS-9W-3K
9	500	4000K	56	>80	LLC-POL-PS-9W-4K
12	660	3000K	55	>80	LLC-POL-PS-12W-3K
12	780	4000K	65	>80	LLC-POL-PS-12W-4K
18	1 100	3000K	61	>80	LLC-POL-PS-18W-3K
18	1 200	4000K	67	>80	LLC-POL-PS-18W-4K
24	1 450	3000K	60	>80	LLC-POL-PS-24W-3K
24	1 600	4000K	67	>80	LLC-POL-PS-24W-4K



Consult SA (PTY) LTD



**SABS**  
ISO 9001