



Introducing the **POLLUX-RSC**



The **POLLUX-RSC** is an adjustable Recessed wall washer designed to highlight Displays and wall features. Perfect for applications that require high quality light output. Adjustable rotate and tilt angles to adapt to changing environments.



Consult SA (PTY) LTD



SABS
ISO 9001

POLLUX-RSC





Product Features

- High power COB LED rectangular wallwasher, designed for retail and commercial applications
- Rotates 350° with a horizontal adjustment 35° available with 24° and 45° beam angles
- No UV from the LED light source prevents stock fade and discolouration
- Supplied with remote LED driver
- Housing in die-cast aluminium - powder coated with structured finish
- Super-purity aluminium reflector with two beam angle options
- Good heat dissipation due to cast aluminium heat sink
- Available in CCT 3000K and 4000K - additional specialised colours available on request
- Available in CRI Ra > 80 and Ra > 90
- Options include DALI dimming, emergency backup and Bluetooth mesh control
- LED life L_{80B10} - 50 000 hours
- Driver life F₁₀ - 100 000 hours
- Supply - 220-240V 50-60Hz PF > 0.95
- Surge current (flicker) < 5%
- 5 year guarantee



160 lm/W

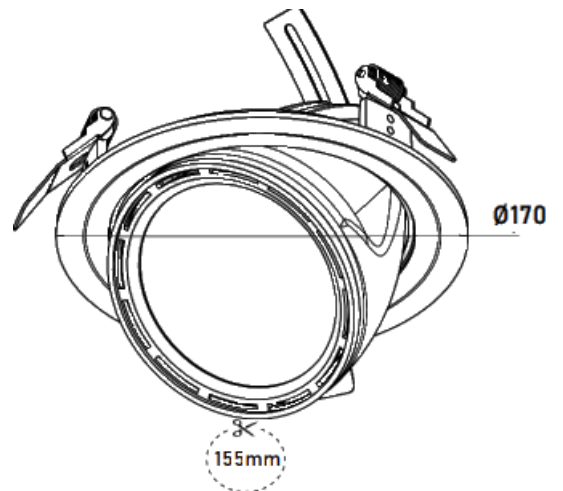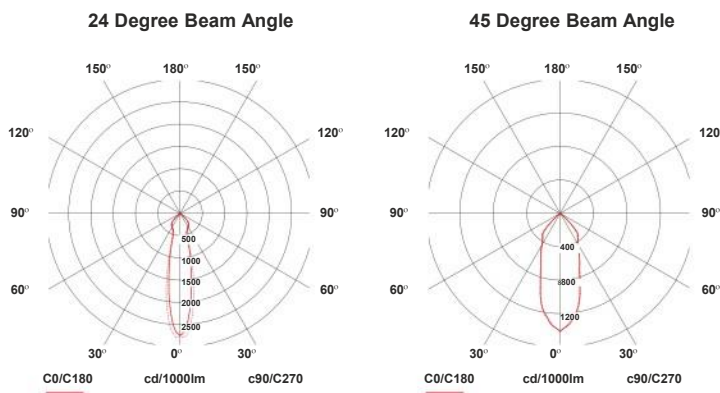

Efficacy Rating

- **PREMIUM RANGE** >140 lm/W
- **MID RANGE** 120 - 140 lm/W
- **ECO RANGE** 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
12	1 860	3000k	155	>80	LLC-POL-RSC-12W-3K
12	1 920	4000K	160	>80	LLC-POL-RSC-12W-4K
17	2 516	3000K	148	>80	LLC-POL-RSC-17W-3K
17	2 601	4000K	153	>80	LLC-POL-RSC-17W-4K
25	3 500	3000K	140	>80	LLC-POL-RSC-25W-3K
25	3 625	4000K	145	>80	LLC-POL-RSC-25W-4K
30	3 990	3000K	133	>80	LLC-POL-RSC-30W-3K
30	4 140	4000K	138	>80	LLC-POL-RSC-30W-4K
36	5 220	3000K	145	>80	LLC-POL-RSC-36W-3K
36	5 400	4000K	150	>80	LLC-POL-RSC-36W-4K
41	5 740	3000K	140	>80	LLC-POL-RSC-41W-3K
41	5 945	4000K	145	>80	LLC-POL-RSC-41W-4K



Consult SA (PTY) LTD



SABS
ISO 9001