



## Introducing the STRIKER-A



The **STRIKER-A** is a decorative, stylish, surface or suspended LED luminaire with a wide range of light distribution, length format and output options for retail, storage and industrial applications.



Consult SA (PTY) LTD



**SABS**  
ISO 9001

# STRIKER-A




## Product Benefits


- Low maintenance
- SABS approved control gear
- SANS-IEC 60598 safety compliance and mark

## Product Features


- Highly efficient modular optics with a wide range of light distribution options
- Low glare
- Variable output possible by setting different drive currents
- Options include DALI dimming, LI-Connect Bluetooth mesh control, tuneable white, emergency and sensor including Organic Response sensor
- Life L<sub>80</sub> B<sub>10</sub> - 50 000 hours
- Driver life F<sub>10</sub> - 100 000 hours
- Supply = 220-240V 50-60Hz PF>0.95
- Ripple (flicker) < 5%
- 5 year guarantee

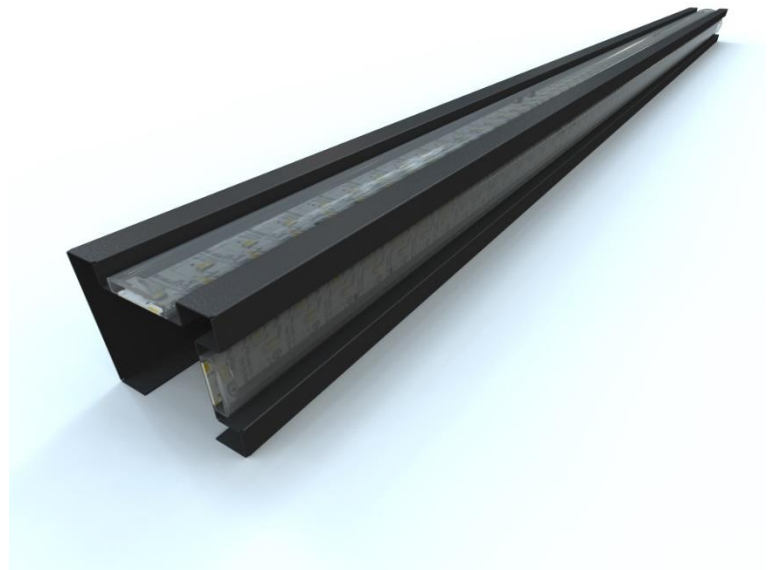


Retail Symmetric

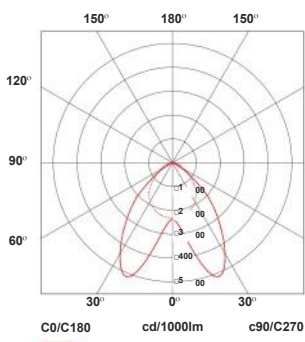

Retail Asymmetric

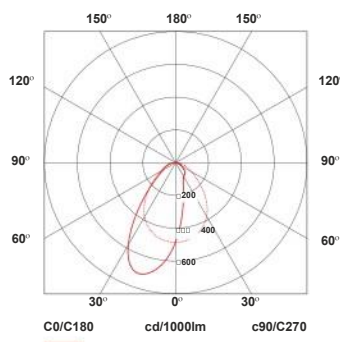

126 lm/W

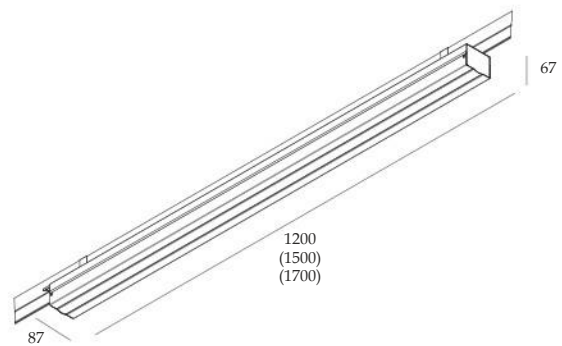

Available in various light distribution options including Retail Symmetric, Retail Asymmetric, Batwing, Wide 60, Wide 90 and High Rack (Oval)

## Efficacy Rating

- PREMIUM RANGE >140 lm/W
- MID RANGE 120 - 140 lm/W
- ECO RANGE 100 - 120 lm/W

Luminaire Wattage	Luminaire Output (Lumens)	Colour Temperature	Efficacy lm/W	Ra (CRI)	Reference Code
<b>1120mm Module</b>					
27W/12W (350mA)	3 400/1 512	4000K	126	>80	LLC-STK-A-27W-12W-1R12
35W/16W (450mA)	4 300/1 968	4000K	123	>80	LLC-STK-A-35W-16W1-R12
42W/18W (550mA)	5 040/2 160	4000K	120	>80	LLC-STK-A-42W-18W-1R12
55W/20W (700mA)	6 220/2 260	4000K	113	>80	LLC-STK-A-55W-20W-1R12
<b>1500mm Module</b>					
41W/18W (350mA)	5 200/2 268	4000K	126	>80	LLC-STK-A-41W-18W-1R15
52W/20W (450mA)	6 400/2 460	4000K	123	>80	LLC-STK-A-52W-20W-1R15
64W/22W (550mA)	7 700/2 640	4000K	120	>80	LLC-STK-A-64W-22W-1R15
82W/30W (700mA)	9 300/3 390	4000K	113	>80	LLC-STK-A-82W-30W-1R15
<b>1700mm Module</b>					
41W/18W (350mA)	5 200/2 268	4000K	126	>80	LLC-STK-A-41W-18W-1R17
52W/20W (450mA)	6 400/2 460	4000K	123	>80	LLC-STK-A-52W-20W-1R17
64W-22W (550mA)	7 700/2 640	4000K	120	>80	LLC-STK-A-64W-22W-1R17
82W-30W (700mA)	9 300/3 390	4000K	113	>80	LLC-STK-A-82W-30W-1R17

