

Torch-EX

Who says tough can't be pretty?

Our industrial LED bulkhead is composed of a marine-grade high-pressure die-cast aluminium body and clear polycarbonate cover all wrapped up with an IP65 rating and able to withstand temperatures of 40°C ambient. Available in 4 different light distributions and standard with a replacable 10kV surge protection this luminaire is rated for zone 21 and zone 22.



SPEC SHEET

Torch-EX

Effective Lumen:	8560 lm
240V:	67W
Power Factor:	0.95
Efficacy:	128 lm/w
Max Ta:	40°C
L&B:	L80 B10 40°C 60K hrs

Fitting Size:

400mm x 280mm x 115mm



kV Protection:
Up to 10kV standard



Colour Temp:
5600K
CR>80 R9>13



Indoor & Outdoor



Front cover:
IK08/J



Lenses:
Polycarbonate



Marine Grade Aluminum

KEY FEATURES

LENSES

- 4 different optics.

FRONT COVER

- Impact rating IK08/5J


TEMPERATURE

- Ambient room temperature -25°C to +40°C.

MOUNTING OPTIONS


- Surface mounting brackets

4 Distribution Options

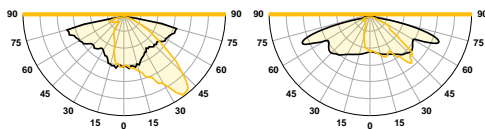

M5

M3M

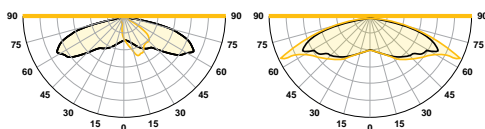

P2M

A5



Proudly Distributed By

+2783 555 2654

+2776 087 2363

Consult SA (PTY) LTD www.ledlightconsult.co.za



Designed and Manufactured by

