


# ZEUS-EX-XP


## The bar just got raised.

Our flagship high output LED High Bay now available in an EX version able to tackle zone 21 and 22 and standard IP65 rating and the ability (on request) to take on temperatures of up to 65°C ambient.

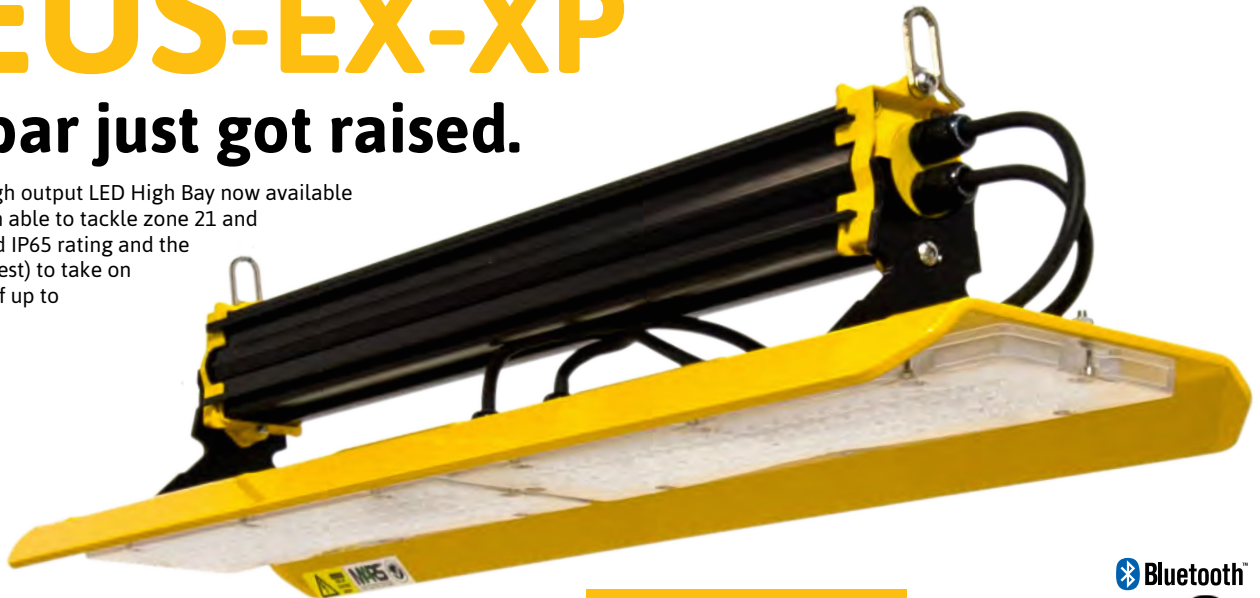

### KEY FEATURES

- **Modular** with extra Lumen Packages up to 160 000lm.
- **Optics** 4 different optics for countless optic combinations
- **3 Size Options** EX Bay XP 102, EX Bay XP 103, EX Bay XP 104
- **Optics** Impact rating IK08/5J
- **Temperature** Ambient room temperature -25°C to +40°C up to +55°C on request

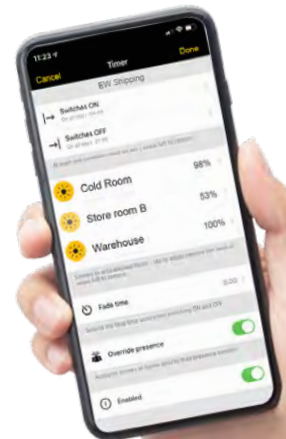

- **IP65** For multiple environments
- **Mounting Options** P2000 Trunking and Pendant



5 year warranty. Please visit [www.energywise.co.za](http://www.energywise.co.za)




### SPEC SHEET

### ZEUS-EX-XP 102

Effective Lumen:	8258 lm	12936 lm	15196 lm
<b>240V:</b>	<b>59W</b>	<b>92W</b>	<b>126W</b>
Power Factor:	0.96	0.96	0.96
mA:	450	700	900
Efficacy:	139 lm/w	141 lm/w	121 lm/w
<b>Max Ta:</b>	<b>55°C</b>	<b>45°C</b>	<b>40°C</b>
L&B:	L80 B10 55°C 60K hrs	L80 B20 45°C 60K hrs	L80 B50 40°C 60K hrs

Fitting Size: **24mm x 100mm x 700mm**

<b>4kv</b> kV Protection: Up to 4kV, 10kV on request	<b>KELVIN</b> Colour Temp: 5600K CR>80 R9>13	<b>IP 65</b> IP Rating: Indoor	<b>Modular:</b> Expandable system
<b>IK08/5J</b> Impact Resistance: IK08/J	<b>PC</b> Housing Difuser: Polycarbonate	<b>AL</b> Construction & Fasteners: Aluminum & SS316	<b>Optional:</b> Bluetooth, Wifi, Dali & Bi Level

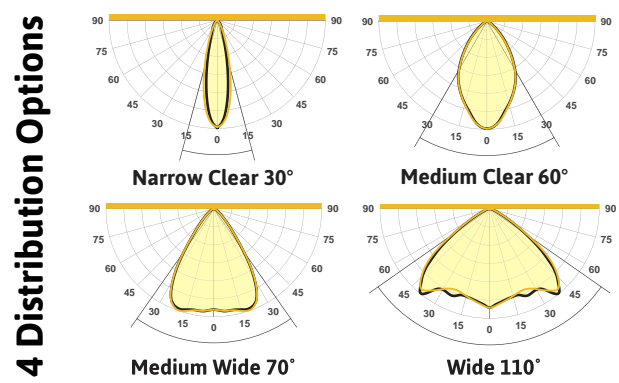

**Proudly Distributed By**

**LED LIGHT** = +2783 555 2654  
= +2776 087 2363

Consult SA (PTY) LTD [www.ledlightconsult.co.za](http://www.ledlightconsult.co.za)

MASC Permit Number MASC-098MR

SABS APPROVED

ISO9001 CERTIFIED

GMP

PROUDLY SOUTH AFRICAN

**Designed and Manufactured by** **Energywise SYSTEMS**